
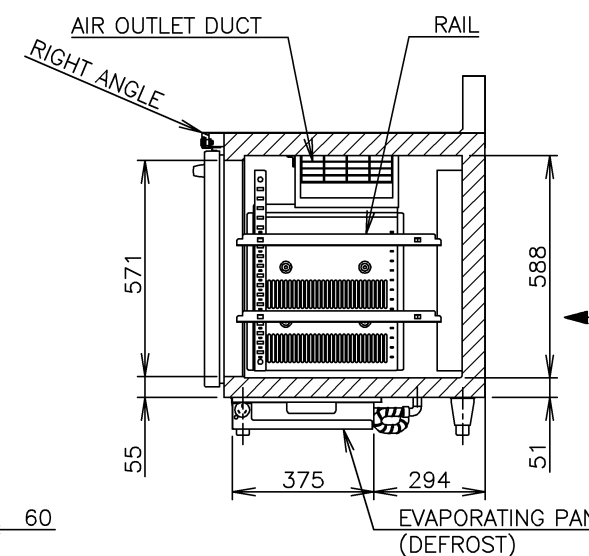
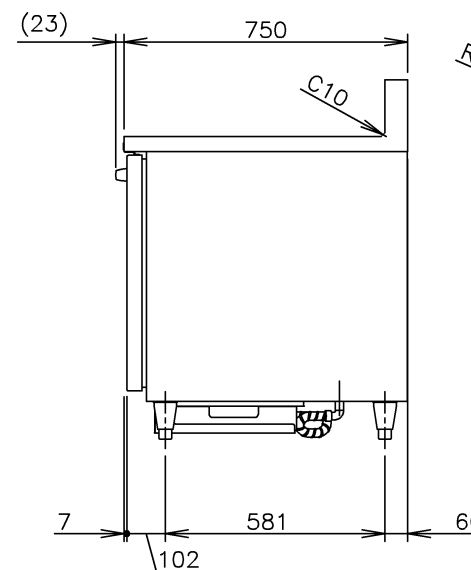
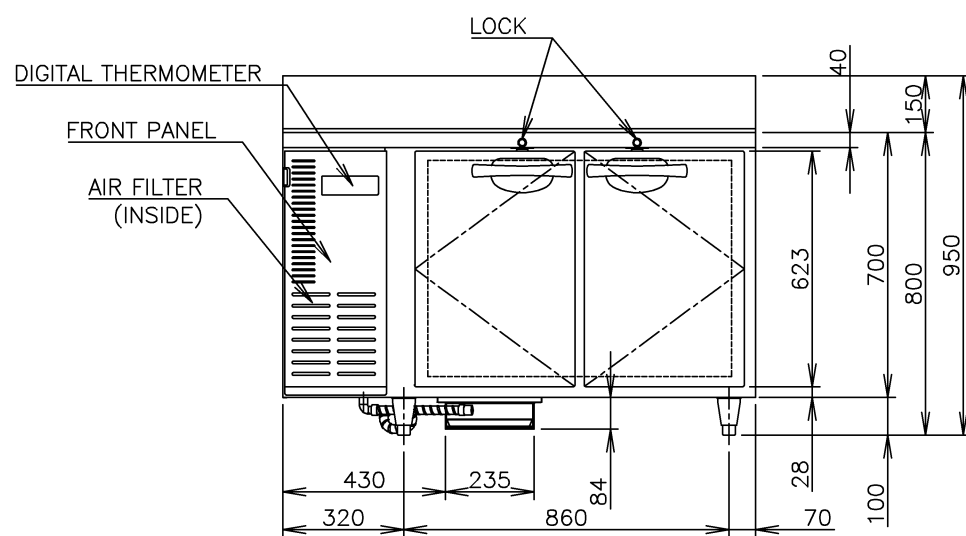


PLUG SHAPE

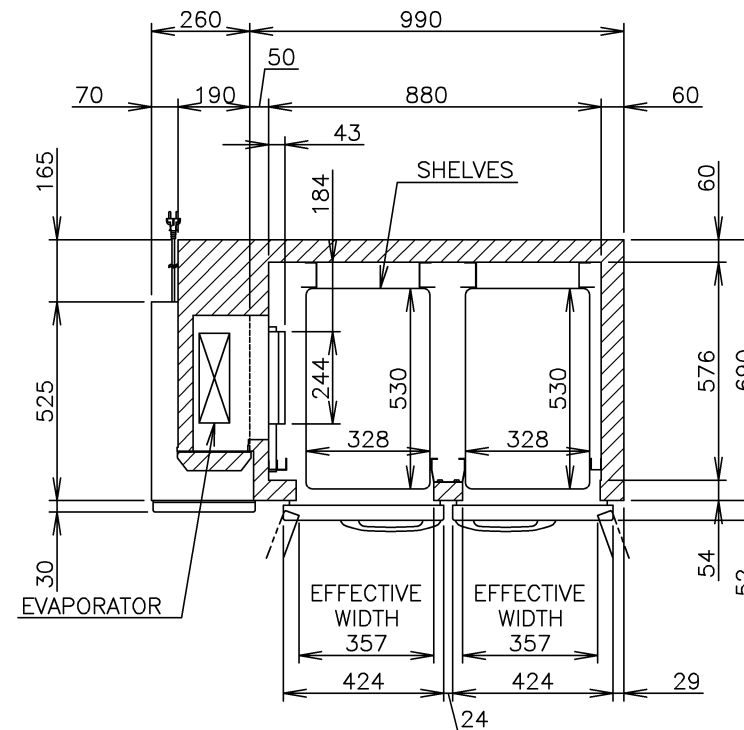

ITEM	Hoshizaki Undercounter Freezer
MODEL	FTC-125SDA-GN
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity: 1.14kVA(5.18A)
AMPERAGE	Rated 3.9A Starting 18.6A
ELECTRIC CONSUMPTION	Motor *W(Power Factor *) Heater 423W Refrigeration 560W Defrost 423W
HEAT REJECTION	*W
POWER CORD	2.8m (Plug with Earth Wire)
EFFECTIVE CAPACITY	301L
OUTSIDE DIMENSIONS	1250mm(W) x 750mm(D) x 800(790-830) + 150mm(H)
INSIDE DIMENSIONS	880mm(W) x 576mm(D) x 588mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic 495W
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R404A/190g
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -25 to -7° C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable from 90 - 130mm
WEIGHT	Net: 102kg (Gross: Approx. *kg)
PACKAGE	Carton 1315mm(W) x 830mm(D) x 940mm(H)
ACCESSORIES	Shelf x 4, Rail x 8
OPERATING CONDITIONS	Ambient Temperature: 5-43° C Voltage Range: Rated Voltage±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 43° C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 43° C and power supply of 220V 50Hz.
3. The cabinet temperature range of -25 to -7° C is guaranteed at ambient temperature of 30° C.
4. Product Code : T018-C740

*Customized
Door Lock
Evaporating Pan
Top Panel Right Angle
Back Guard

HOSHIZAKI UNDERCOUNTER FREEZER FTC-125SDA-GN

APPROVED ONDA	CHECKED YAMASAKI	DESIGNED KAWAKAMI	DRAWN NISHIKORI	SCALE 1/20	TRIGONOMETRY
*	*	△	****	DATE 2015.04.27	DRAWING NO. D15481
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △